BE-405b

Control up to 16 PCs, with one Roaming Mouse.

The BE-405b is a 4-port USB KM box that provides for interaction with up to 4 PCs using a single roaming (Free-Flow) mouse, and one keyboard. With excellent expandability, one Master BE-405b + four Slave BE-405bs let the user interact with a maximum of 16 PCs.




The product provides “Roaming Mouse” functionality, which means the operator simply moves the mouse cursor across screen borders in any direction, either horizontally or vertically, instantly selecting the PC they need to control – providing super easy-to-use KVM switching that saves time and desk space.

Features

- Provides 4 x USB Type A and 4 x mini USB Type ports.
- Seamless KM switching between PCs by one Roaming Mouse or Hotkey.
- Multiple PCs, multiple monitors, single point of input.
- No software or networking is required on mission controlled PCs.
- Interactive LED light for screen identification.
- Flexible screen layout of 1 x 4, 4 x 1, or 2 x 2 on a single BE-405b for 4 PCs.
- Expandable to 5 x BE-405b for 16 PCs in a 4 x 4 screen layout.
- Adjustable mouse speed.
- Provides 2 x RS-232 port for third party external control.
- Firmware upgradable.

Front / Rear View

Front

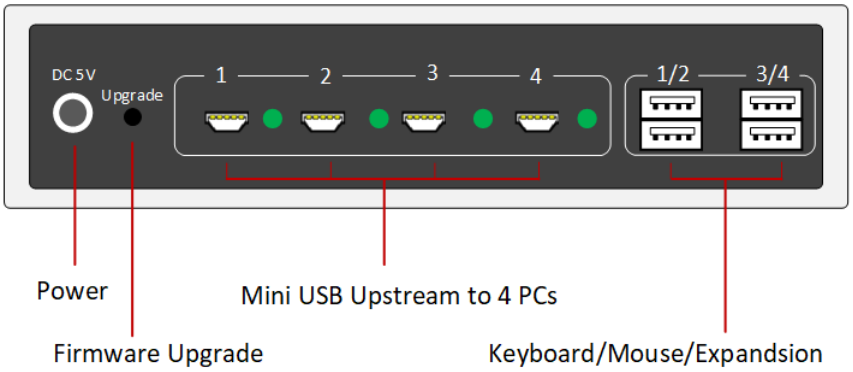


Rear




Specifications

Model No.		BE-405b
USB Upstream		4 x Mini USB to PC
USB Downstream		4 (keyboard, mouse, expansion)
LED Light Indicator		4
RS-232		2 x 3-pin Phoenix terminal block
Power		DC 5V 1A
Environment	Operating Temp.	0 to 70℃
	Storage Temp.	-40 to 100℃
	Humidity	0 ~ 80% non-condensing
Physical Properties	Material	aluminum
	Weight	400g
	Dimension	110(L) x 154(W) x 30(H) mm

Connection Diagram

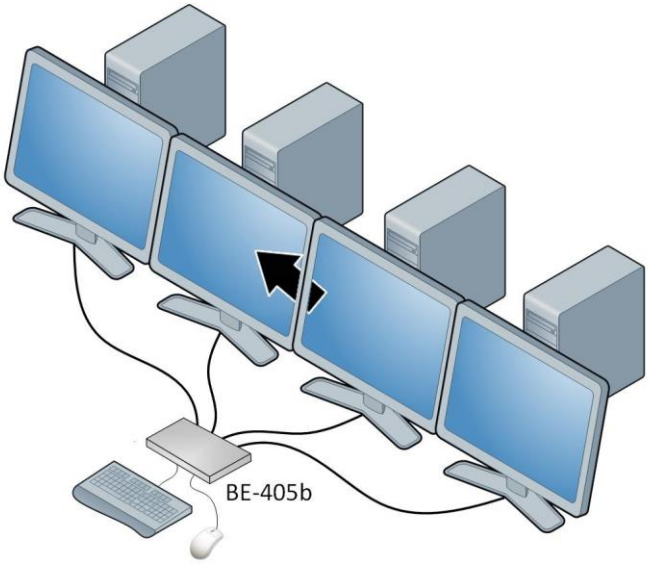

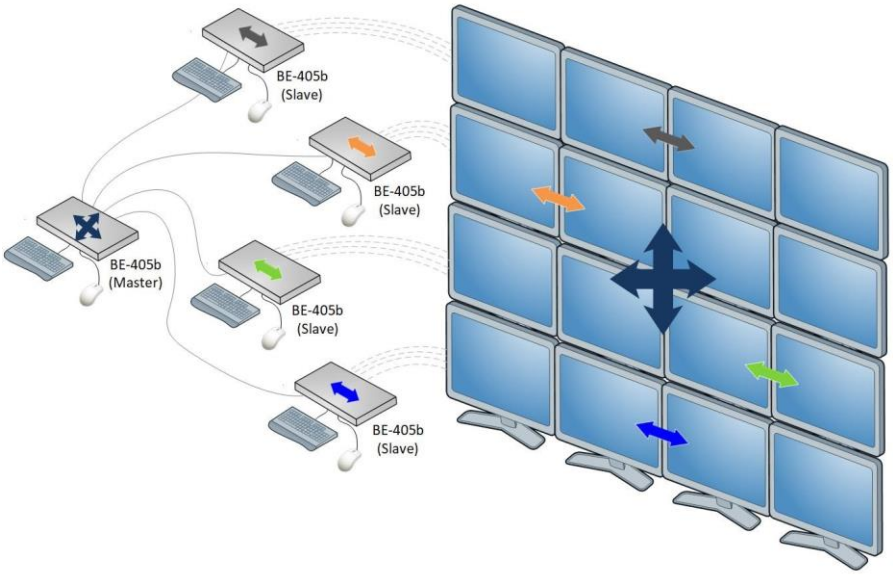

Beacon Extender Inc.
1F, No. 10, Lane 50, Sec. 3 Nan Gang Rd, Taipei City, 115, Taiwan